

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number  
**WO 2004/085136 A1**

- (51) International Patent Classification<sup>7</sup>: **B29C 63/02 //** 65/18, 65/20, B32B 31/00, 31/00, 35/00
- (21) International Application Number: PCT/KR2003/000616
- (22) International Filing Date: 27 March 2003 (27.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **ROYAL SOVEREIGN INC.** [KR/KR]; 24B/9L, 451-8 Nonhyun-Dong, Namdong-ku, Incheon-si 404-254 (KR).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KIM, Suk-Kyou** [KR/KR]; Daeyeong villa. 1-302, Gajwa 3, 278-21, Seo-gu, Incheon-si 404-254 (KR).
- (74) Agent: **HAW, Yong-Noke**; 8th Fl. Songchon Bldg., 642-15 Yoksam-dong, Kangnam-ku, Seoul 135-080 (KR).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR REGULATING ROTATION SPEED OF ROLLER IN LAMINATOR

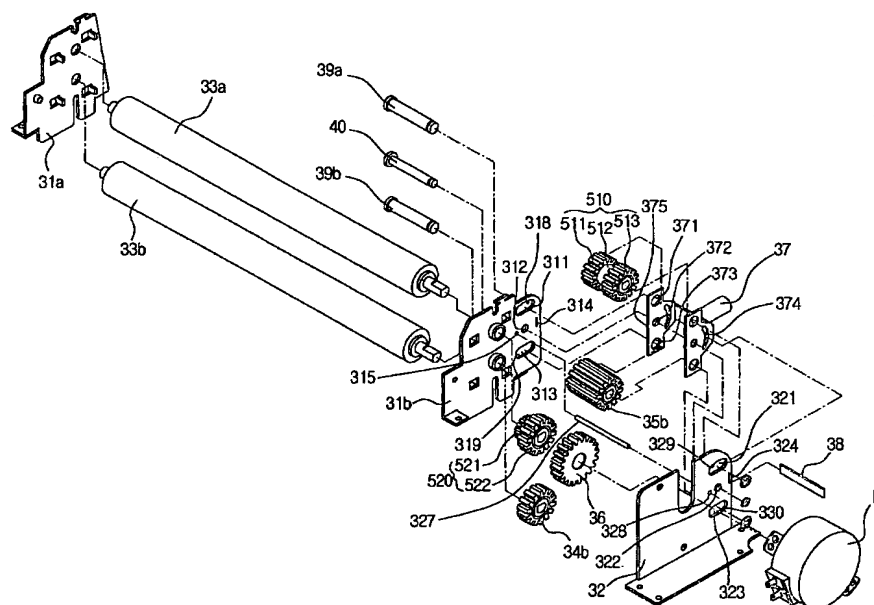

(57) Abstract: There is provided an apparatus for adjusting a rotation speed of a roller in a laminator. In this apparatus, at least one of the roller gear connected with a roller and a motor gear connected with a motor is a two-stage shift gear in which teeth of the same shape are formed in two stages. A connection gear meshed with the first stage of the two-stage shift gear is provided with a recessed gear which includes a gear portion to be meshed with the first stage and a recessed portion whose outer circumference is recessively formed so that a second stage of the two-stage shift gear can be placed therein.